

PRODUCT DETAILS

Index Number	24012
Wood Species	Ash
Pattern	Herringbone
Grading	Elegant
Surface Colour	Sandstone Original

SURFACE

Surface coating	Extra Matt Lacquered 5 %, 7x Layers, >105 g/m2, BONA
Surface	Brushed
Bevel	4 side bevels

INSTALLATION


Installation Method	Glue-down to subfloor or concrete
Profile type	T&G

PRODUCT DIMENSIONS

Top layer	3 mm Ash Hardwood (+/- 0.2mm)
Core layer	11 mm birch plywood
Dimensions	14 x 100 x 600 mm
One pack includes	24 boards
Weight per 1 m2	≈ 9 kg

TEST AND MARKS

CE mark and test by	Eph Dresden
Mark and icons	CE, EN14342:2005
Formaldehyde test	E1, M1

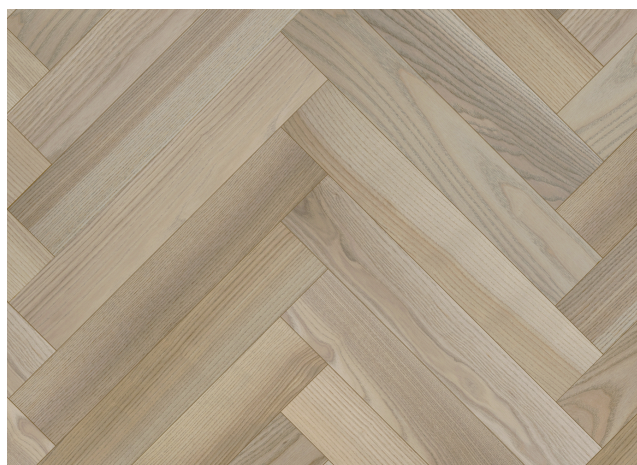

ASH SANDSTONE ORIGINAL #24012

PARAMETERS

Under floor Heating	Yes (18-27 °C)
Warranty	30 years
Moisture content	6,5 % (+/-1%)

COLOUR CHANGE

Wood is a natural product - noticeable color change over time may occur

DETAIL DESCRIPTION

Healthy knots (diam. Up to)	Unlimited (seldom)
--------------------------------	--------------------

Repaired knots (diam. Up to)	15 mm (seldom)
---------------------------------	----------------

Discoloration	No High
---------------	---